



INSTRUCTION

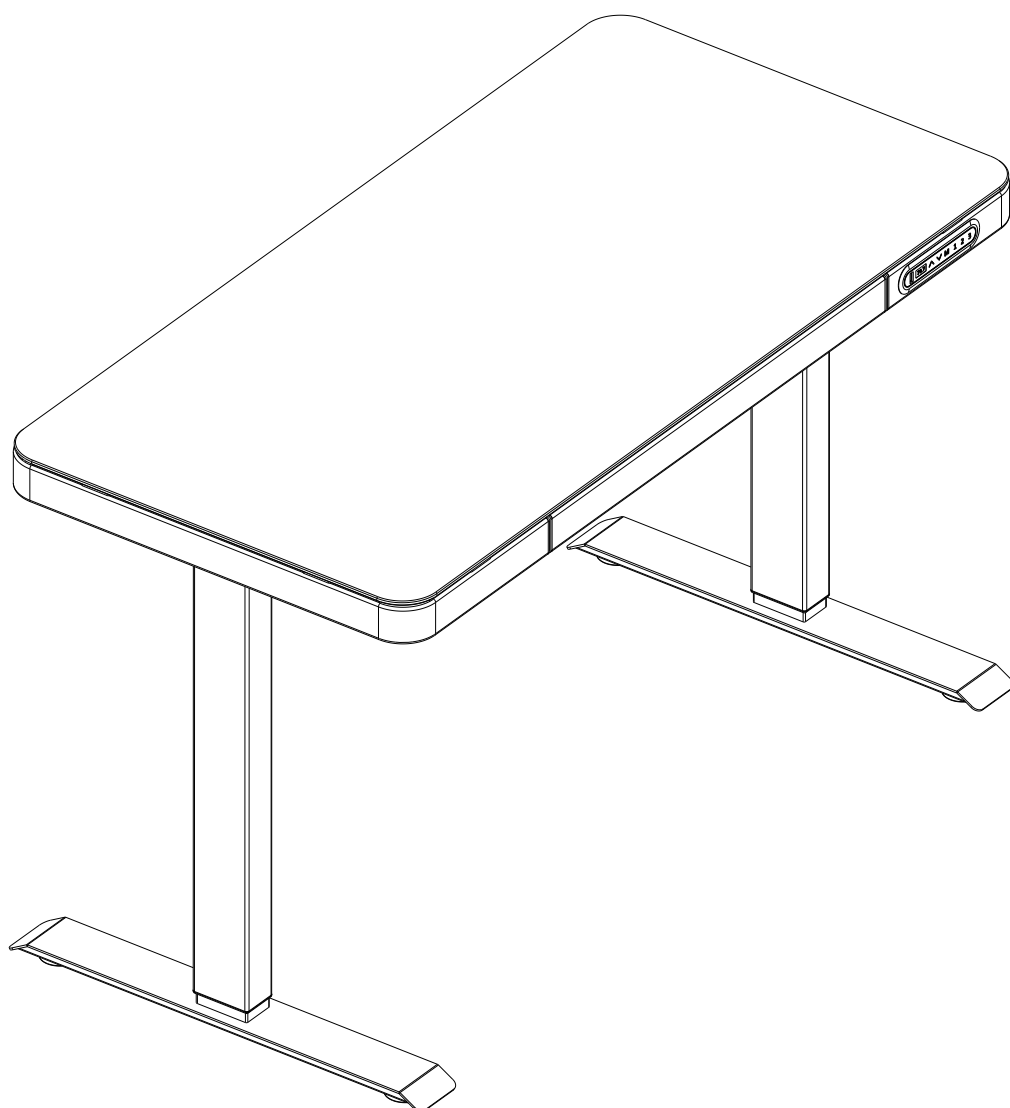


Part of the steps suggest
two people install

Main Components


Please check you have all the parts listed below

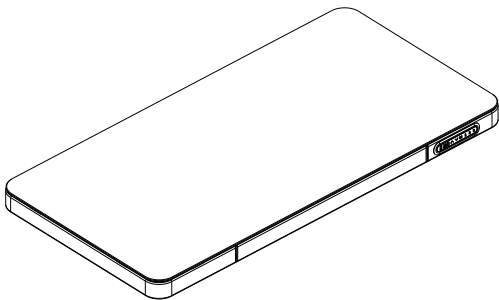


1 Table top Qty 1 (120*60*5.9cm)

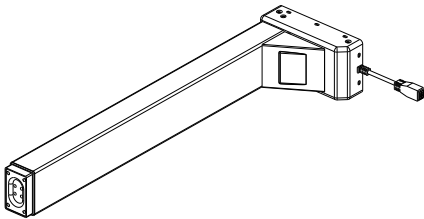

2 Leg Qty 2 (66.5*17.6*9.6cm)

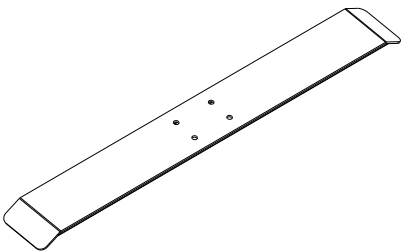

3 Foot Qty 2 (60*7.5*1.8cm)






4 Leveling Studs Qty 4

Fixings, Fittings And Tools

Please check all the fittings listed below

Note: The quantities below are the correct amount to complete the assembly . In some case more fittings may be supplied than be required.


A  Qty 8 M6*16mm Screw	B  Qty 1 Power Cord Qty 1 Leg Extension Cord	C  Qty 1 M4 Allen key	D  Qty 5 Cable Clips
---	---	---	---

Assembly Steps

Step 1

Attach each foot with
qty 4 Screws(Part#A)

A






M6*16mm Screw Qty 8

C




M4 Allen key Qty 1

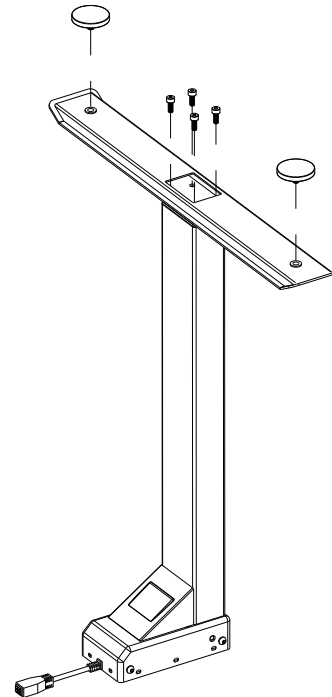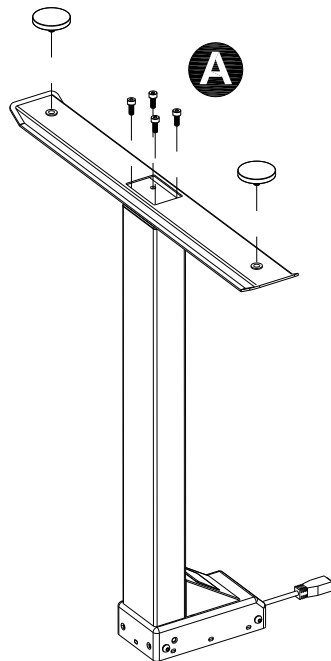

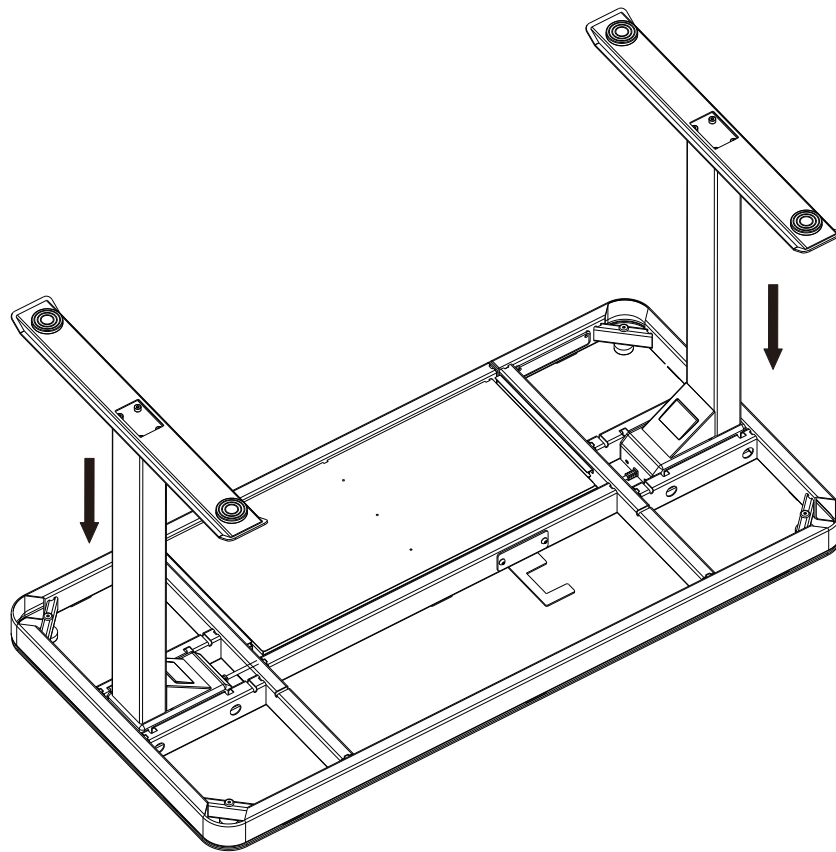


Attach two legs into the table top(Part#1)

Step 3




M6*12mm Screw Qty 8
(Pre-installed Screws)

C



M4 Allen key Qty 1

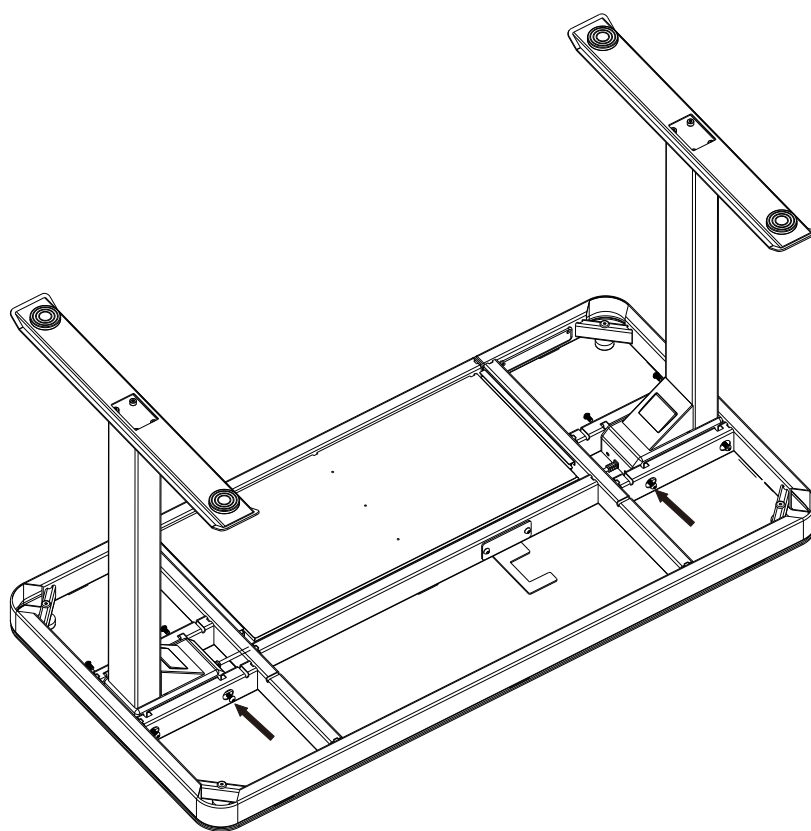


Tighten 8 Pre-installed Screws

Step 4

Attach control box
& connect cables

B








Qty 1 Power Cord
Qty 1 Leg Extension Cord

D




Qty 5 Cable Clips

Attention:
protect the
table top well

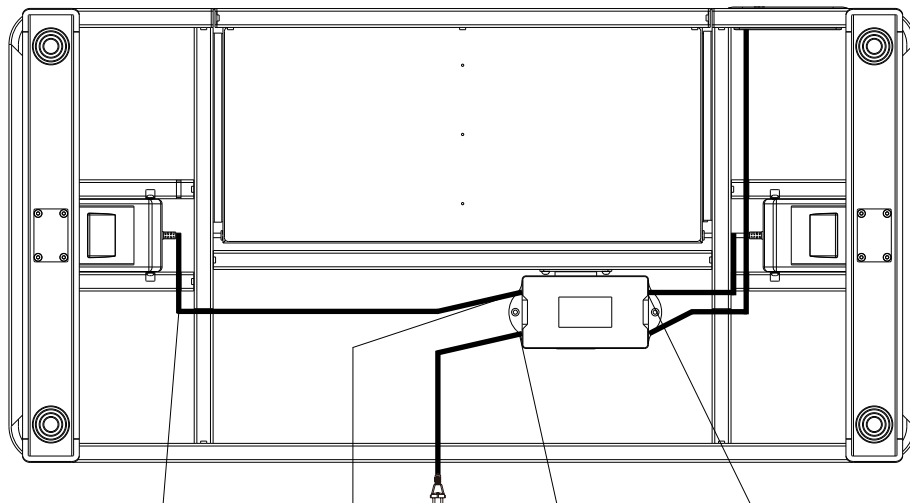


Step 5

Carefully turn the desk over into it's final location and connect to a power source.

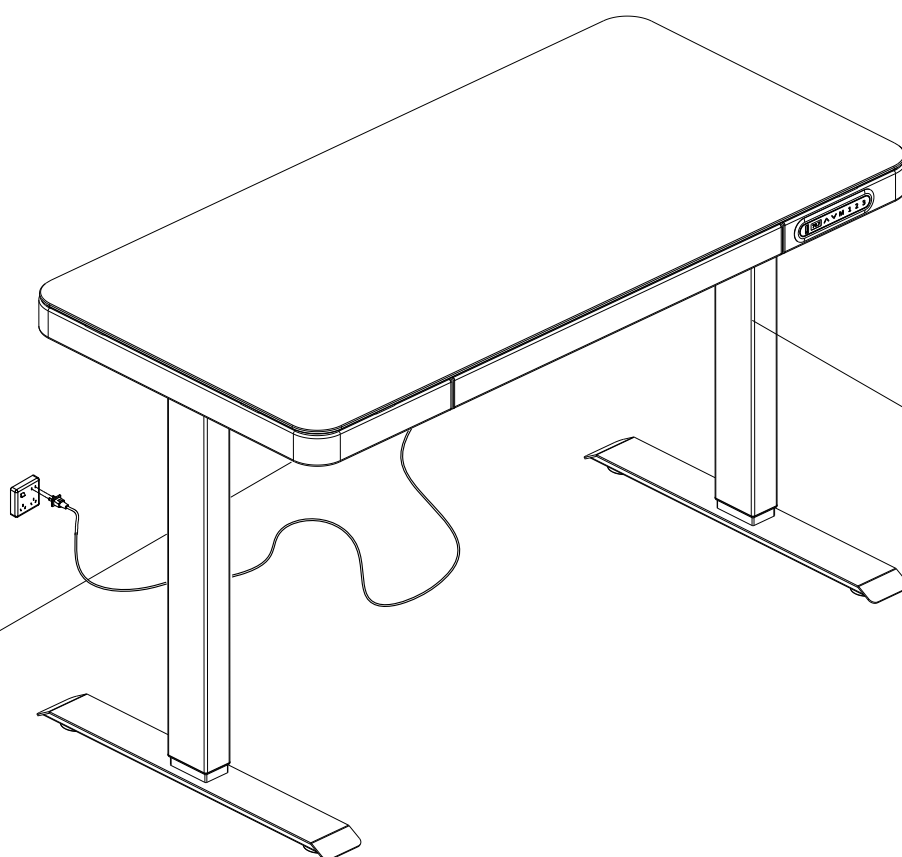

Ready To Use

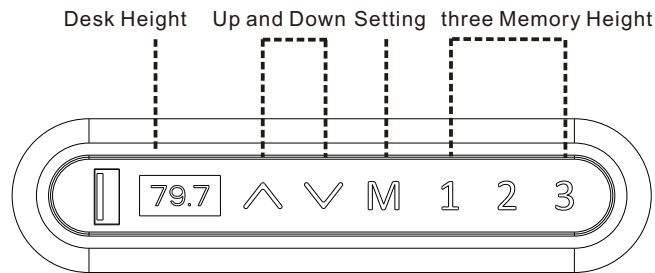

Before Plugging the table into the outlet, make sure that

- The lift columns are level and set at the lowest position.
- All the screws are tightened, to avoid the desk making noise and wobbling.


Activate the desk by following the next steps.

- Please press button down and hold for 10-15 seconds until it stutters and beeps.
- Release the button, then your desk is ready to use.

Operation Guide


1. Memory desired height

- Press button "M", display show "S-" with flash.
- Press number and set desired position.

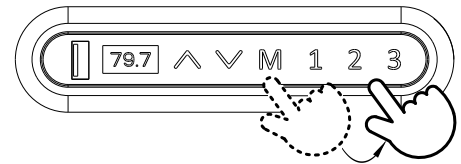

2. Advanced Safety feature- lock and unlock the table.


- Press button up and down at same time for 5 seconds, display "LOC"
- All single button will be inactive and table will be unable to move.
- Pressing button up and down together will unlock the keypad and release the LOC

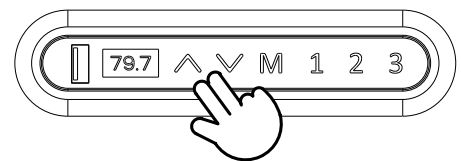

3. Reset the table

When display show Error code or RST, Please reset the table.

- Unplug the power cord from the control box.
- Unplug the cable that links the keypad to the control box.
- Wait 30 minutes and plug all the cables in again.
- Do the reset: please press button down and hold for 10-15 seconds until it stutters and beeps.

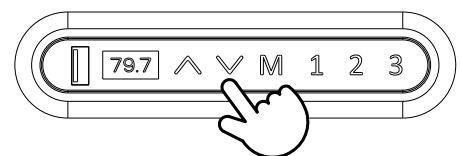

Press by holding
10-15 seconds

If the keypad displays HOT, please unplug and replug and let it cool off for a couple of minutes before proceeding again.